

MICRO-CRIMP™


Product Showcase



Series 79 with size #12 power pins for up to 23 amp current capacity.

Micro-Crimp Combo Layouts

Twenty-nine contact arrangements are available with size #23 contacts for signal and data, size #16 contacts for up to 13 amps power, or size #12 contacts for up to 23 amp capacity. All 29 arrangements are available with crimp pins or with printed circuit tails.



790-028PH-66 with stainless steel guide pins for blind mate applications.

Guide Pins for Blind Mating

Series 79 panel connectors can be configured with guiding hardware for module-to-chassis applications.



Gold-plated M39029 size #12 and #16 contacts for high current capacity.

Snap-In Power Pins

Series 79 connectors accept standard M39029 contacts. These crimp contacts are plated with 50 microinches gold over nickel underplating.

Pneumatic Contacts

Snap these "gas" contacts into any size #12 contact cavity. Attach standard tubing to the contact. These stainless steel contacts are removable.



Size #12 pneumatic contacts withstand up to 100 PSI air pressure for pitot tube applications.

Shielded Panel Mount Connectors


Avoid EMI problems "inside-the-box" with optional EMI adapters. These adapters attach to standard panel mount crimp-type versions.



Panel mount connectors with optional EMI adapter.

Conductive Panel Gaskets

Panel mount connectors are supplied with conductive fluorosilicone gaskets for sealing to bulkheads. These gaskets provide an easy way to assure a watertight installation.

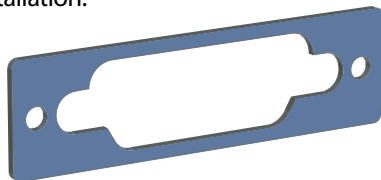

Watertight EMI gaskets are supplied with all panel mount Micro-Crimp connectors.



Low profile EMI adapters for cable braid termination with Glenair's BAND-IT® straps.

EMI Backshell Adapters

These two-piece adapters fit into a groove on Micro-Crimp cable connectors. Attach to connector with screws (provided). Elliptical banding platform provides ample room for large wire bundles.



Right angle PCB connectors for thru-hole termination

Right Angle PCB Header

Available in panel mount (shown) or free-standing versions, these connectors feature an EMI shroud and threaded board mounting holes.

Overmolded Cordsets

Rugged overmolded cordsets available for all sizes of Micro-Crimp Connectors



Dimensions in inches (millimeters) and are subject to change without notice.

© 2009 Glenair, Inc.

CAGE Code 06324

Printed in U.S.A.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912

www.glenair.com

A-4

E-Mail: sales@glenair.com

Rev. 04-July-2009