


Maximum Panel Thickness

Panel thickness for type 00, 02 connectors used for rear mounting											
Shell size	10SL	14S	16S 16	18	20	22	24	28	32	36	40
A	3.7	3.7	3.7	3.7	3.7	3.7	5.25	5.25	6.1	6.1	6
Panel thickness for type 02PP, 03, 030 and 038 connectors (with threaded holes)											
Shell size	10SL	14S	16S 16	18	20	22	24	28	32	36	40
A	7.2	7.2	7.2	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5

Panel Cutout

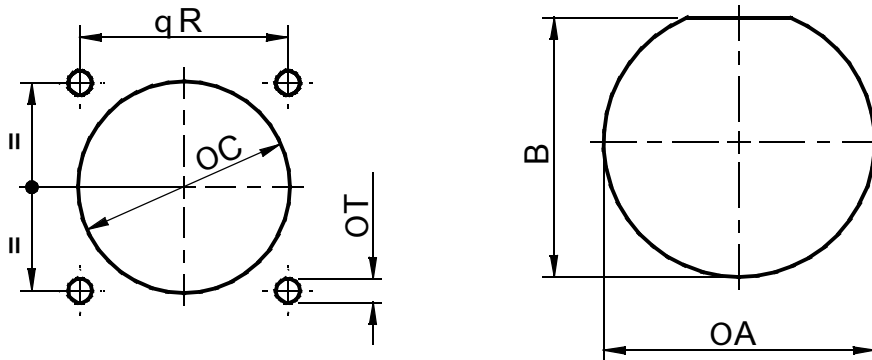

**Glenair Commital ITS and ITS-RG Series
Reverse Bayonet Connector Assemblies
Panel Cut-Out Mounting Data**



Panel cutout for type 00, 02, 26 connectors (front panel mounting)											
Shell size	10SL	14S	16S 16	18	20	22	24	28	32	36	40
∅C	17	20	23	26.5	30.0	33	36	42	48.5	55	61
R ±0.1	18.2	23	24.6	27	29.4	31.8	34.9	39.7	44.5	49.2	55.5
∅T	3.4	3.4	3.4	3.4	3.4	3.4	3.9	3.9	4.5	4.5	4.5
Panel cutout for type 02PP, 03, 030 connectors (rear panel mounting)											
Shell size	10SL	14S	16S 16	18	20	22	24	28	32	36	40
∅C	19.1	25.5	28.3	31.7	35.0	38.3	41.8	47.6	54.3	60.5	66.4
R ±0.1	18.2	23	24.6	27	29.4	31.8	34.9	39.7	44.5	49.2	55.5
∅T	4.5	4.5	4.5	4.5	4.5	4.5	4.5	5.5	5.5	5.5	5.5
Panel cutout for type 07, 070, 078 connectors (jam nut receptacles)											
Shell size	10SL	14S	16S 16	18	20	22	24	28	32	36	40
∅A +0.25	22.4	28.75	31.95	35.1	38.30	42.01	44.65	51	57.35	63.7	70.05
B -0.35	21	27.4	30.95	33.75	36.85	39.09	43.35	49.55	55.95	62.35	68.55

